


TERAND

The Maintenance Professional's Choice

SAFETY SOLVENT CHLORINATED 521

A residue-free, super fast-drying, high-powered spray that dissolves grease and rinses away dirt and grime without injury to working parts. Contains an acceptable replacement for 1,1,1-trichloroethane under the EPA SNAP program. Contains no petroleum distillates. Features a 30,000 volt dielectric strength, making this the only degreaser safe for use on electric motors, generators, relays and control panels while equipment is in operation. Energized equipment use only. Not to be used for motorized vehicle maintenance, or their parts. Do not use on plastics.

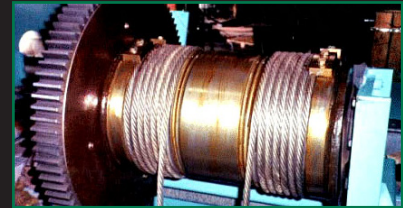

FEATURES

- Powerful Flushing Action
- Safe for Cleaning Energized Electrical Equipment
- 30.0 kV Dielectric Strength (ASTM D-877)
- Level-1 Storage Rating
- No Petroleum Distillates

FOR USE ON

Energized Industrial Equipment, Heating and Air Conditioning Equipment, Refrigeration Equipment, Generators, Electric Motors, Windings and Power Tools.

Packaging:	UOM	12/CS
	Container Size	20 OZ. AEROSOL
	Net Fill Weight	NET WT. 18 OZ. (1 LB. 2 OZ.) (510 Grams)
	Shipping Weight	15 lbs.
Physical Properties:	Appearance	Clear, Colorless Liquid
	Odor	Ether-like Odor
	pH	N/A
	Spray Pattern	Circular
	Flash Point (Concentrate)	None to Boiling
	Specific Gravity	1.454
	Flammability	Non-Flammable Spray
	Dielectric Strength	30,000 Volts
	Propellant	Carbon Dioxide
Regulatory:	Coverage	N/A
	Solvent System	Chlorinated
	VOC%	96.45%
	VOC Restricted Area(s)	50 State Compliant
	NFPA Code 30B Storage Rating	Level 1 Aerosol
	EPA Number	N/A
	NSF Certified	N/A

www.cpaeroscience.com
(800) 327-1835

