


# TERAND

The Maintenance Professional's Choice

## OPEN GEAR LUBRICANT 780

Open Gear Lubricant penetrates into the teeth of open gears. Forms a thin, stringy film that recoats gear teeth with each revolution, unlike typical greases which would simply be pushed away. Open Gear Lubricant is not affected by water after set up. Fortified with moly to provide improved lubricity and broaden the effective temperature and pressure range.

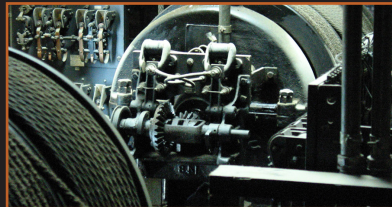

### FEATURES

- Fortified with molybdenum disulfide
- Recoats continuously
- New fast tacking formula prevents sling-off!
- Prolongs gear and equipment life

### FOR USE ON

- Dredging, drag lines, winches, rock crushing machines, gears, heavy duty street cleaning and snow removal equipment
- Use wherever an underwater lubricant is needed



### Specs:

Can Size	20 oz.
Net Weight	14 oz. (396 g)
Shipping Weight	18.6 oz per can
Packaged	12 cans per case
Extender Tube	No
<b>Regulatory:</b>	
Ozone Depleting Compounds	None
Recyclable Package	Yes
Flammable	Yes
<b>Physical Characteristics:</b>	
Color	Black
Fragrance	Solvent
Shelf Life	1 year +

[www.cpaeroscience.com](http://www.cpaeroscience.com)  
(800) 327-1835

